

IKELITE




DS51 Substrobe

The compact, lightweight and affordable Ikelite DS51 Substrobe is an excellent choice for any underwater photographer. The DS51's intensity and angle of coverage make it equally suited for macro and general photography. Features TTL mode as well as manual mode with 6 power settings in one-half f-stop increments.



DS160 Substrobe

The Substrobe DS160 has quickly made its mark becoming the new favorite of underwater photographers world-over. Enjoy warm, beautiful coverage and lightning fast recycle times. A built-in LED focus light automatically turns off and on when the strobe fires. TTL plus 10 manual power settings make this our most versatile Substrobe yet.

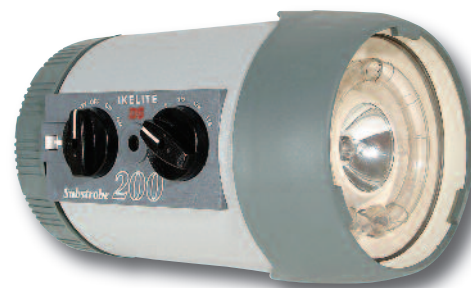

DS200 Substrobe

This is a high performance professional strobe with the original features that revolutionized underwater photography. The venerable Substrobe 200 now has the newest IC chips and IGBT circuitry make this ultra-wide and ultra powerful strobe compatible with current digital cameras and any TTL circuitry included in our housings.

DS-Substrobe Comparison Chart

	DS-51	DS-160	DS-200
Model #	#4044.1	#4060	#4062.2
Weight	0.6kg (1.3 lb)	1.3 kg (2.75 lb)	1.8 kg (3.9 lb)
Dimensions Diameter x Length	8x12cm 3.2x4.7"	9.6x17.9cm 3.75x7"	11.5x19cm 4.5x7.5"
Energy Rating watt-sec.	50	160	200
Coverage Angle (w/o diffuser) Diffuser adds 10°	70°	90°	100°
Widest Lens w/o diffuser			
Nikonos	28mm	15mm	15mm
SLR	28mm	18mm	18mm
Guide # ISO 100			
Surface-feet	56	76	76
Underwater-feet	28	38	38
Surface-meters	17	24	24
Underwater-meters	9	12	12
Firing Modes	T	T	T
T = TTL	M (6 powers)	M (10 powers)	M (4 powers)
M = Manual			
Color Temperature	5700°K	4800°K	4800°K
Power Source	4 "AA" Alkaline Ni-Cad Ni-MH (not included)	NiMH Module	NiMH Module
Flashes (full power)	200 flashes	225 flashes	160 flashes
Recycle Time	3.5 sec.	1.5 sec.	1.6 sec.
Modeling Light	Optional Mini C-Lite	Built-in LED	Built-in



Sync Cords

Ikelite offers a full range of sync cords to connect various manufacturer's strobes to a variety of manufacturer's camera housings. Most cords are available for single or dual strobe use. Manufacturers include Ikelite, Nikonos, Inon, and Sea&Sea.



Arm Systems

Ikelite's articulating ball-socket arm systems with quick-release mount allows easy mounting and removal. Interchangeable components allow you to add to the Ikelite system or attach to TLC/ULCS arm systems.



Smart Charger

#4066.1

Works with DS125, DS160 and DS200 Substrobes. Ideal for the traveling photographer. Auto-ranging input allows the charger to work in any country whose electrical systems falls within a 100v - 240v range.

www.marinfoto.no
0047 92023248