

SHENZHEN SEAFROGS PHOTOGRAPHIC EQUIPMENT CO., LTD.

📍 No.12-10, Jiaye Road, Pinghu
Town, Longgang District,
Shenzhen, China

🌐 www.seafrogs.com

✉ info@seafrogs.com



www.seafrogs.com



Instagram
[@seafrogs_official](https://www.instagram.com/seafrogs_official)



E-catalogue




Professional Underwater
Photographic Equipment

PRODUCT CATALOG

◆ INNOVATION ◆ HIGH QUALITY
◆ ATTENTIVELY ◆ SERVICE

Shenzhen Seafrogs Photographic Equipment Co., Ltd.
www.seafrogs.com

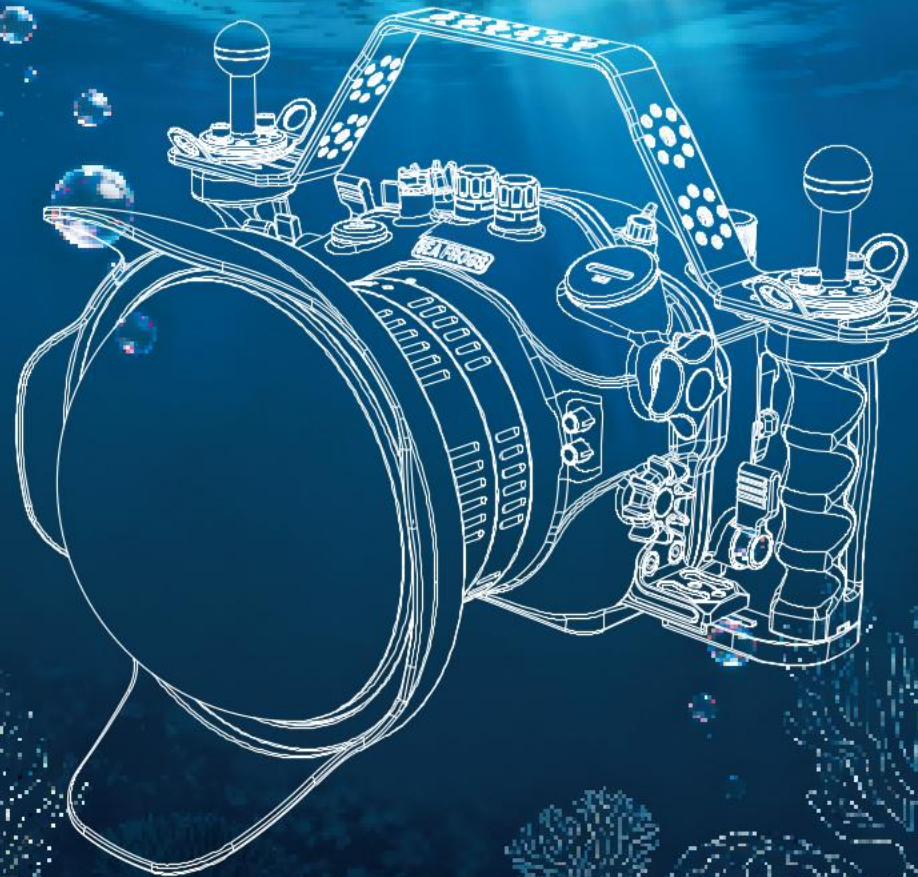

Contents

01-19	Aluminum Alloy Camera Housing & Monitor
20-25	Polycarbonate Housing For Sony
23-31	Polycarbonate Housing For Canon
32	Polycarbonate Housing For Nikon
33-35	Polycarbonate Housing For Fujifilm
36-38	Polycarbonate Housing For Olympus
38	Polycarbonate Housing For Panasonic
40	Polycarbonate Housing For Mobile Phone
41	Vacuum Pump System
42-50	Strobe/Fill Light/Video Light/Flashlight
51-52	Wide-Angle Dome Port
53-55	Diving Accessories
60-63	Model List



Sea frogs specializes in professional underwater imaging equipment, delivering complete shooting solutions for divers, underwater photographers and creators at every skill level. Our full-range product lineup includes plastic and aluminum waterproof housings for cameras, action cameras and smartphones, alongside dedicated lights, optical lenses and extension accessories. We continuously refine our ecosystem to empower more reliable underwater visual creation.

Representing a major brand upgrade, Sea frogs aluminum housings adopt precision engineering for rock-solid stability and responsive handling, supported by a lifetime warranty. Sea frogs is both your first entry-level underwater gear and your long-term professional partner.

Born for exploration. Making professional underwater imaging accessible.



UNDERWATER IMAGING ECOSYSTEM

Aluminum Housings Optical Lenses Lights Accessories

PRODUCT DESCRIPTION

Aluminum Alloy

For Sony Camera Series



For SONY A7M4
SF10001

Waterproof structure: O-ring seal
Waterproof depth: Max. 100m/328ft
Product Size: W393 x D138 x H224mm (body)
Material: Aluminum Alloy, Glass
Color: ■ ■



For SONY A7R5
SF10002

Waterproof structure: O-ring seal
Waterproof depth: Max. 100m/328ft
Product Size: W393 x D138 x H224mm (body)
Material: Aluminum Alloy, Glass
Color: ■ ■



For SONY A1
SF10003

Waterproof structure: O-ring seal
Waterproof depth: Max. 100m/328ft
Product Size: W393 x D138 x H224mm (body)
Material: Aluminum Alloy, Glass
Color: ■ ■

PRODUCT DESCRIPTION

Aluminum Alloy

For Sony Camera Series



For SONY A7RIII/A7 III
SF10004

Waterproof structure: O-ring seal
Waterproof depth: Max. 100m/328ft
Product Size: W393 x D136 x H227mm (body)
Material: Aluminum Alloy, Glass
Color: ■ ■



For SONY A7S III
SF10005

Waterproof structure: O-ring seal
Waterproof depth: Max. 100m/328ft
Product Size: W393 x D138 x H224mm (body)
Material: Aluminum Alloy, Glass
Color: ■ ■



For SONY A7R5
SF10006

Waterproof structure: O-ring seal
Waterproof depth: Max. 100m/328ft
Product Size: W393 x D139 x H225mm (body)
Material: Aluminum Alloy, Glass
Color: ■ ■

PRODUCT DESCRIPTION

Aluminum Alloy

For Sony Camera Series



For SONY A7C II/A7CR
SF10007

Waterproof structure: O-ring seal
Waterproof depth: Max. 100m/328ft
Product Size: W362 x D134 x H204mm (body)
Material: Aluminum Alloy, Glass
Color: ■ ■



For SONY A9 III
SF10008

Waterproof structure: O-ring seal
Waterproof depth: Max. 100m/328ft
Product Size: W393 x D138 x H229mm (body)
Material: Aluminum Alloy, Glass
Color: ■ ■



For SONY A7R IV
SF10009

Waterproof structure: O-ring seal
Waterproof depth: Max. 100m/328ft
Product Size: W393 x D135 x H227mm (body)
Material: Aluminum Alloy, Glass
Color: ■ ■

PRODUCT DESCRIPTION

Aluminum Alloy

For Sony Camera Series



For SONY A1 II

SF10010

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W363 x D132 x H204mm (body)

Material: Aluminum Alloy, Glass

Color: ■ ■



For SONY A6700

SF10011

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W362 x D132 x H204mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■



For SONY ZV-E1

SF10012

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W362 x D129 x H217mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■

PRODUCT DESCRIPTION

Aluminum Alloy

For Sony Camera Series



For SONY A7M5

SF10013

Waterproof structure: O-ring seal

Waterproof depth: Max. 100m/328ft

Product Size: W393 x D134 x H224mm (body)

Material: Aluminum Alloy, Glass

Color: ■ ■



For SONY A7R VI

SF10014

Waterproof structure: O-ring seal

Waterproof depth: Max. 100m/328ft

Product Size: W393 x D134 x H224mm (body)

Material: Aluminum Alloy, Glass

Color: ■ ■

PRODUCT DESCRIPTION

Aluminum Alloy

For Sony Camera Series

Compatible Lenses:

- Sony FE 16-35 F4 ZA OSS
- Sony FE PZ 16-35 F4 G
- Sony FE 16-35 F2.8 GM
- Sony FE 16-35 F2.8 GM II
- Sony FE 24-70 F4 ZA OSS
- Sony FE 24-70 F2.8 GM
- Sony FE 12-24 F4 G
- Sony FE 16-25 F2.8 G
- Sony FE 12-24 F2.8 G
- Sony FE 90 F2.8 Macro G OSS
- Sony FE 4 20-70mm G
- Sony FE 70-200mm F4 Marco
- SONY FE 24-105 F4 G OSS
- SONY FE 24-70 F2.8 GM II
- SONY E4 PZ 10-20 F4 G

Compatible Lenses:

- SONY E 10-18 F4 OSS
- Sony FE 28-60 F4-5.6
- SONY FE 14mm F1.8 GM
- Sony FE 28mm F2
- Sony FE 24-50mm F2.8 G
- Sony FE 16mm F1.8 G
- Sony FE 28-70mm F2 GM
- Sony FE 28-70mm F3.5-5.6 OSS
- Sony DT 50mm F1.8 SAM
- Sony FE 2.8 50mm Macro
- Sigma FE 24-70 F2.8 DG DN
- Sigma FE 14-24 F2.8 DG DN
- Sigma 10-18mm 1:2.8 DC DN
- Sigma 24-70mm f2.8 DG DN II
- Sigma FE 105mm 1:2.8 DG DM MACRO

For Fujifilm

Compatible Lenses

- Fujifilm XF 80mm F2.8 R LM OIS
- Fujifilm XF 18mm F2.0 R
- Fujifilm XF 23mm F2.0 R WR
- Fujifilm XF 60mm F2.4 R
- Fujifilm XF 10-24mm F4 R OIS
- Fujifilm XF 8-16mm F2.8 R LM WR
- Fujifilm XF 30mm F2.8 R LM WR
- Fujifilm XF 35 F2 R WR
- Fujifilm XF 18-55mm F2.8-4.0 R LM OIS
- Fujifilm XF 16-55 mm F2.8 R LM WR
- Fujifilm XF 16-80mm F/4 R OIS WR
- Fujifilm GF LENS 120mm F4 R LM OIS WR
- Fujifilm GF LENS 35-70mm F4.5-5.6 WR
- Fujifilm GF LENS 20-35mm 1:4 R WR

PRODUCT DESCRIPTION

Aluminum Alloy

For Fujifilm X-T5



SF12001

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W393 x D138 x H230mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■



For Fujifilm GFX100 II



SF12002

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W393 x D162 x H240mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■

For Fujifilm GFX100 S II



SF12003

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W393 x D155 x H236mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■

PRODUCT DESCRIPTION

Aluminum Alloy

For Olympus TG7



SF17001

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W164 x D93 x H113mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■

For Olympus

Compatible Lenses

Olympus 60mm F2.8 MACRO, Olympus M.Zuiko Digital 12-100mm F4

Olympus M.Zuiko Digital 7-14mm F2.8, Olympus M.Zuiko Digital 12-40mm F2.8 Pro

For Olympus OM-1/OM-1 II



SF17002

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W362 x D134 x H218mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■

For Olympus OM-5 II



SF17003

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W416 x D129 x H218mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■



PRODUCT DESCRIPTION

Aluminum Alloy

For Nikon Z8



SF13001

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W416 x D231 x H169mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■

For Nikon D850



SF13002

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W393 x D146 x H233mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■

For Nikon Z6 III



SF13003

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W393 x D137 x H230mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■



PRODUCT DESCRIPTION

Aluminum Alloy

For Nikon Z6 II/Z7 II



SF13004

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W393 x D165x H229mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■



For Nikon ZR



SF12003

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W393 x D167 x H230mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■

For Nikon Z9



SF13006

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W393 x D174 x H268mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■

PRODUCT DESCRIPTION

Aluminum Alloy

For Nikon

Compatible Lenses

NIKKOR AF-S 14-24mm F/2.8 G ED

NIKKOR AF-S Fisheye 8-15mm F3.5~4.5 E ED

NIKKOR AF-S Micro 105mm F2.8 G ED

NIKKOR AF-S Micro 60mm F2.8 G ED

NIKKOR AF-S 24-70mm F2.8 ED VR

NIKKOR Z 14-30mm F/4S

NIKKOR Z 24-70 F2.8 S

NIKKOR Z 14-24 F2.8 S

NIKKOR Z MC 105mm F2.8 VR S

NIKKOR Z 24-70mm F4 S

NIKKOR Z 17-28mm F2.8

TAMRON 17-35mm F2.8-4 Di OSD Zoom Gear

TAMRON Z 90mm F2.8 DI III Macro VXD



For Canon Camera Series

Compatible Lenses:

Canon RF 14-35 F4 IS USM

Canon RF 15-35mm F2.8 L IS USM

Canon RF 100mm F2.8 L MACRO IS USM

Canon RF 24-70mm F2.8 LIS USM

Canon RF S 18-45mm F4.5-6.3 IS STM

Canon RF 15-30mm F4.5-6.3 IS STM

Canon RF 10-20mm F4 LIS STM

Canon RF 24-105mm F4 I IS USM

Canon RF 85mm F2 Macro IS STM

Canon RF 24-105mm F4-7.1 IS STM

Canon EF 8-15mm F/4L USM Fisheye

Canon EF LENS 24-105mm 1;4 L IS USM

Canon MACRO EF 100mm 1:2.8L IS USM

Canon EF 16-35mm 1:2.8 L II USM

Canon EF 16-35mm 1:2.8 L III USM

PRODUCT DESCRIPTION

Aluminum Alloy



For Canon R6 II

SF14002

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W416 x D166 x H227mm (body)

Material:

Aluminum Alloy, Glass

Color: ■■



For Canon R5 II

SF14004

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W393 x D166 x H231mm (body)

Material:

Aluminum Alloy, Glass

Color: ■■



For Canon R6 III

SF14005

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W393 x D156 x H164mm (body)

Material:

Aluminum Alloy, Glass

Color: ■■

PRODUCT DESCRIPTION

Aluminum Alloy



For Canon R5C

SF14006

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W393 x D195x H234mm (body)

Material:

Aluminum Alloy, Glass

Color: ■■



For Canon C50

SF14007

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W399 x D155 x H235mm (body)

Material:

Aluminum Alloy, Glass

Color: ■■



For Canon CV1

SF14008

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W363 x D138x H218mm (body)

Material:

Aluminum Alloy, Glass

Color: ■■



PRODUCT DESCRIPTION

Aluminum Alloy

For Panasonic

Compatible Lenses

LLUMIX 12-60mm 2.8-4.0 ASPH

LUMIX 7-14mm F4.0 ASPH

LUMIX DG MACRO-EL MARIT 45mm F2.8 ASPH

DG VARIO-SUMMILUX F1.7 10-25MM ASPH

LEICA DG SUMMILUX 1:1.7/9mm ASPH

For Sigma fp

Compatible lenses:

SIGMA 14-24 F2.8 DG DN

SIGMA 15mm F1.4 DG DN FISHEYE

SIGMA 14mm F1.4 DG DN

SIGMA 20mm F1.4 DG DN

SIGMA 105mm F2.8 DG DN MACRO



For Panasonic GH7



SF16001

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W393 x D149 x H227mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■

For Sigma fp



SF18001

Waterproof structure:

O-ring seal

Waterproof depth:

Max. 100m/328ft

Product Size:

W362 x D113 x H224mm (body)

Material:

Aluminum Alloy, Glass

Color: ■ ■

PRODUCT DESCRIPTION

Aluminum Alloy

Monitor & Monitor Housing

Model: SF-J02

Waterproof structure: O-ring seal

Waterproof depth: Max. 150m/492ft

Screen size: 5.5 inch

Screen resolution: 1920 x 1080, 4K

HDR : 2000cd/m2



Monitor Housing for Shimbol M5

SF400002

Waterproof depth: Max. 100m / 328ft

Waterproof structure: O-ring seal

Screen size: 5.5 inch

Screen resolution: 1920 x 1080 4K



PRODUCT DESCRIPTION

Aluminum Alloy

200m



For GoPro 13/12/11/10/9 SF15001

Waterproof depth: Max. 200m/656ft
Material: Aluminum Alloy, Glass
Product Size: W108 x D52 x H93mm
Weight: 530g (With camera and battery)



200m



For DJI Osmo Action 5 Pro/4 SF15002

Waterproof depth: Max. 200m/656ft
Material: Aluminum Alloy, Glass
Product Size: W112 x D52 x H94mm
Weight: 492g (With camera and battery)

200m



For DJI Osmo Action 6/5 Pro/4 SF15003

Waterproof depth: Max. 200m/656ft
Material: Aluminum Alloy, Glass
Product Size: W108 x D52 x H93mm
Weight: 530g (With camera and battery)

For Action Camera Series

PRODUCT DESCRIPTION

Aluminum Alloy



For GoPro 13/12/11/10/9 SF15003

Waterproof depth: Max. 60m/195ft
Material: Aluminum Alloy, Glass
Product Size: W89 x D44 x H67mm
Weight: 160g



For Insta360 Ace Pro 2 SF15005

Waterproof depth: Max. c
Material: Aluminum Alloy, Glass
Product Size: W93 x D48 x H73mm
Weight: 160g



For DJI Osmo Action 6/5 Pro/4 SF15006

Waterproof depth: Max. 60m/195ft
Material: Aluminum Alloy, Glass
Product Size: W93 x D44 x H74mm
Weight: 252g





PRODUCT DESCRIPTION

Plastic Version

For Sony Camera Series

A6400

Compatible lens: 16-50mm
Size: W180 x D140 x H115mm
Weight: 550g

A6000/A6300/A6500

Compatible lens: 10-18mm/16-50mm
Size: W185 x D146 x H135mm
Weight: 1056g

A6600

Compatible lens:
FE Mount (16-35 f2.8/16-35 f4/
28-70 f3.5-5.6/90mm f2.8)
E Mount (10-18mm/16-50mm)
Size: W192 x D128 x H144mm (Body)
Weight: 1010g (Body)

A6700

Compatible lens:
FE Mount (16-35 f2.8/16-35 f4/
28-70 f3.5-5.6/90mm f2.8)
E Mount (10-18mm/16-50mm)
Size: W192 x D128 x H144mm (Body)
Weight: 1010g (Body)



(16-50mm)



(A6400)

(16-50mm)



(A6000/A6300/A6500)



PRODUCT DESCRIPTION

Plastic Version



Name: A9 III


Depth rating: 40m/130ft
Compatible lens: 16-35/28-70/90mm
Size: W210.5 x D147.4 x H175.8mm



Name: A7II Pro

Depth rating: 40m/130ft
Compatible lens: 16-35/28-70/90mm
Size: W205.8 x D216 x H171.6mm
Weight: 1000g

For Sony Camera Series



Name: A9 / A9 II

Depth rating: 40m/130ft
Compatible lens: 16-35/28-70/90mm
Size: W202.3 x D216.2 x H174.3mm
Weight: 1452.5g



Name: A7R III PRO / A7 III

Depth rating: 40m/130ft
Compatible lens: 16-35/28-70/90mm
Size: W202.3 x D216.2 x H174.3mm
Weight: 1452.5g



Name: A7 Pro

Depth rating: 40m/130ft
Compatible lens: 16-35/28-70/90mm
Size: W201 x D200 x H166mm
Weight: 980g



Name: A7RIV

Depth rating: 40m/130ft
Compatible lens: 16-35/28-70/90mm
Size: W219 x D193 x H176mm
Weight: 1543g

PRODUCT DESCRIPTION

Plastic Version



SF-S-A7R5 PRO



A7C II/A7CR PRO



A7S III Pro

Compatible lens: FE 16-35mm/28-70mm/90mm

Size/Weight:

(16-35mm kit) 220.3 x 202.8 x 304.9mm / 1764g

(28-70mm kit) 244.8 x 202.8 x 304.9mm / 1543g

(90mm kit) 288 x 211.3 x 304.9mm / 1618g



SF-S-A7R5

Depth rating: 40m/130ft

Size: W205 x D145 x H163mm (Body)

Weight: 1130g (Body)



A7CII/A7CR



SF-S-A7C

PRODUCT DESCRIPTION

Plastic Version

For Sony A7M4/A7M5

Model: SF-S-A7M4/A7M5

Depth rating: 40m/130ft

Waterproof structure: O-ring seal

Material: PC, Optical glass, Stainless, steel, Silicone

Operating temperature: 0-40°C (32-104°F)

Compatible lens:

1. SONY FE F4/16-35 ZA OSS
2. SONY FE 2.8/16-35 GM
3. SONY FE F4/24-70 ZA OSS
4. SONY FE 2.8/24-70 GM
5. SIGMA 24-70mm 1:2.8 DG DN Ø82 (FE)
6. SONY FE 4/12-24 G
7. TAMRON 17-28mm F/2.8 Di III RXD
8. SIGMA 14-24mm 1:2.8 DG DN
9. FE 3.5-5.6/28-70 OSS
10. SONY FE 4/24-105 G OSS
11. FE 2.8/90 MACRO G OSS
12. FE 4/PZ16-35G

*More lens development, please pay attention to the official website update.

Function Extension Support:

- | | | |
|---|---|---|
| ☒ Aperture Adjustment | ☒ 1/4 Mounting Plate Handheld Bracket | ☒ Vacuum Test |
| ☒ Fiber Optic Cable Flash | ☒ Electronic Leak Detection Sensor | ☒ Interchangeable Lenses Port |
| ☒ Cold Shoe Interface | ☒ Light Arms Extend | ☒ Lenses Manual Zoom |



For Sony A7M4 PRO



For Sony A7M5 PRO

1. SIGMA 24-70mm 1:2.8 DG DN Ø82 (FE)
2. SONY FE 4/24-105 G OSS
3. FE 2.8/90 MACRO G OSS



For Sony A7M4



FE 3.5-5.6/28-70MM

1. SONY FE F4/16-35 ZA OSS
2. FE 3.5-5.6/28-70 OSS

1. SONY FE F4/16-35 ZA OSS
2. FE 3.5-5.6/28-70 OSS

PRODUCT DESCRIPTION

Plastic Version

For Sony Camera Series

Model: ZV-1 / ZV-E1 / ZV-E10 / ZV-E10 II

Depth rating: 40m/130ft

Waterproof structure: O-ring seal

Material: PC, Optical glass, Stainless steel, Silicone

Operating temperature: 0~40°C (32~104°F)



For Sony FX3/FX30

Model: SF-S-FX3 / SF-S-FX30

Depth rating: 40m/130ft

Waterproof structure: O-ring seal

Material: PC, Optical glass, Stainless steel, Silicone

Operating temperature: 0~40°C (32~104°F)

Compatible lens:

- ① FE 3.5-5.6/28-70 OSS
- ② FE 4/16-35 ZA OSS
- ③ FE 2.8/90 MACRO G OSS
- ④ E4/10-18 OSS
- ⑤ E 3.5-5.6/PZ 16-50 OSS



PRODUCT DESCRIPTION

Plastic Version

For Sony RX100 Series

Function Extension Support:

- ☒ Fiber Optic Cable Flash
- ☒ Electronic Leak Detection Sensor
- ☒ Cold Shoe Interface
- ☒ Light Arms Extend
- ☒ 1/4 Bracket Expansion



Name: RX100 (I-V)

Depth rating: 60m/195ft

Size: W155 x D133 x H120mm

Weight: 784g



Name: RX100VI

Depth rating: 60m/195ft

Compatible lens: 24-200mm

Size: W156 x D147x H132mm

Weight: 784g



Name: RX100VII

Depth rating: 60m/195ft

Compatible lens: 24-200mm

Size: W156 x D147x H132mm

Weight: 784g

PRODUCT DESCRIPTION

Plastic Version

For Canon Camera Series

Compatible lens:

Canon EF 16-35mm 1:2.8 L II USM
Canon EF 16-35mm 1:4 L IS USM
Canon EF 16-35mm III
Canon EF 100MM
Canon EF 24-105mm 1:4 L IS USM
Canon EF-S 60mm 1:2.8
Canon EF 17-40mm 1:4 L USM
Canon RF 15-35mm F2.8 L IS USM
Canon RF 24-105mm F4 L IS USM
Canon RF 14-35MM F/4 L IS USM
Canon RF 100mm F2.8 L Macro IS USM



For Canon EOS R5 II

Model: SF-S-R5 II
Depth rating: 40m/130ft
Waterproof structure: O-ring seal
Material: PC, Optical glass, Stainless steel, Silicone
Operating temperature: 0-40°C (32-104°F)
Size: W207 x D152 x H160mm

PRODUCT DESCRIPTION

Plastic Version

For Canon EOS 5D/6D Series



Name: EOS 5DIII/5DIV

Depth rating: 40m/130ft

Size: W 234 x D 210 x H 180mm

Weight: 1715g

Name: EOS 6D Mark II

Depth rating: 40m/130ft

Size: W 337 x D 269 x H 212mm

Weight: 2954.5g

PRODUCT DESCRIPTION

Plastic Version

For Canon Camera Series

For Canon EOS R3

Model: SF-S-R3
Depth rating: 40m/130ft
Waterproof structure: O-ring seal
Material: PC, Optical glass, Stainless steel, Silicone
Operating temperature: 0-40°C (32-104°F)
Size: W345 x D166 x H235mm

For Canon EOS R50

Model: SF-S-R50
Depth rating: 40m/130ft
Waterproof structure: O-ring seal
Material: PC, Optical glass, Stainless steel, Silicone
Operating temperature: 0-40°C (32-104°F)
Size: W190 x D138 x H150mm



(SF-S-R3)

Compatible lens:

1. EF 16-35mm 1:2.8L II USM
2. EF 16-35mm 1:4L IS USM
3. EF 24-105mm 1:4L IS USM
4. EF 16-35mm III
5. RF 15-35mm F2.8L IS USM
6. RF 24-105mm F4L IS USM
7. EF 24-70 F/2.8L II USM
8. EF 17-40mm 1:4L USM
9. EF-S 60mm 1:2.8
10. EF 100mm



(SF-S-R50)

PRODUCT DESCRIPTION

Plastic Version

For Canon Camera Series



PowerShot V1

Waterproof structure:
O-ring seal
Waterproof depth:
Max. 40m/130ft



EOS R

Compatible lens:
EF (16-35mm f/2.8L III) (100mm f/2.8L)
Size/Weight:
W206.3 x D277 x H191mm (2303g)



G7XII

Compatible lens: 24-100mm
Depth rating: 40m/130ft
Size: W160 x D130 x H115mm
Weight: 550g



EOS R5

Depth rating: 40m/130ft
Size: W298.8 x D224.7 x H191.3mm
Weight: 1786g (include WA005-A)



G7XIII

Compatible lens: 24-100mm
Depth rating: 40m/130ft
Size: W160 x D130 x H115mm
Weight: 550g



EOS R6

Depth rating: 40m/130ft
Size: W217.3 x D202.8 x H161.6mm
Weight: 1345g (include FL60)

PRODUCT DESCRIPTION

Plastic Version

For Canon EOS Camera Series



(EOS R6 II)

- 1:EF 16-35mm 1:2.8 L II USM
- 2:EF 16-35mm 1:4 L IS USM
- 3:EF 24-105mm 1:4 L IS USM
- 4:EF 16-35mm III
- 5:EF 100mm MACRO
- 6:CANON LENS RF 15-35mm F2.8 L IS USM
- 7:CANON LENS RF 24-105mm F4 L IS USM
- 8:EF 24-70 F/2.8 L II USM
- 9:EF 17-40mm 1:4 L USM

EOS R6 / EOS R6 II

Compatible lens:

- ① EF 16-35mm 1:2.8 L II USM
- ② EF 16-35mm 1:4 L IS USM
- ③ EF 16-35mm III
- ④ EF 100mm MACRO
- ⑤ EF 24-105mm 1:4 L IS USM
- ⑥ RF 24-105mm F4 L IS USM
- ⑦ RF 15-35mm F2.8 L IS USM
- ⑧ EF 24-70mm F/2.8 L II USM
- ⑨ EF 17-40mm 1:4 L USM

Size/Weight:

FL60 kit (W217.374 x D202.8 x H161.6mm /1345g)
FL100 kit (W277.5 x D208.9 x H188.4mm /2173g)
WA005-A kit (W298.8 x D224.7 x H191.3mm/1786g)



(EOS R6)

- EF 17-40MM 1:4 L USM
- EF-S 60MM 1:2.8

- 1:EF 16-35mm 1:2.8 L II USM
- 2:EF 16-35mm 1:4 L IS USM
- 3:RF 24-105mm F4 L IS USM
- 4:EF 16-35mm III
- 5:EF 100mm MACRO
- 6:RF 15-35mm F2.8 L IS USM
- 7:EF 24-105mm 1:4 L IS USM

PRODUCT DESCRIPTION

Plastic Version

For Canon EOS Camera Series

EOS M5/M6

Compatible lens:

- EF-M 22mm f/2 STM
- EF-M 18-55mm f/3.5-5.6 IS STM
- EF-M 15-45mm f/3.5-6.3 IS STM
- EF-M 18-150mm f/3.5-6.3 IS STM
- EF-S 60mm f/2.8 USM
- EF-M 28mm f/3.5 IS STM
- EF 100mm f/2.8 USM

Size/Weight:

(22mm kit) 113x177x120mm / 635g
(18-55mm kit) 180x177x141mm / 1073g

EOS M6 II

Size: 188*114*144mm(Body)

Weight:

1140g (22mm)/1159g(28mm)
1159g (60mm)/1349g(15-45/18-55mm)
1988g (100mm)/1189g(18-150mm)
1595g (WA005-A)/1446g(WA005-B)



(EOS M5)



(EOS M6)



(EOS M6 II)

- (EF-M 18-150mm 1:3.5-6.3 +lens adapter)
- (EF 100mm 1:2.8L +EF-EOS M adapter)
- (EF-M 15-45mm 1:3.5-6.3)
- (EF-M 18-55mm 1:3.5-5.6)
- (EF-M 28mm f/3.5 IS STM)
- (EF-S 60mm 1:2.8 +EF-EOS M lens adapter)
- (EF-M 22mm f/2)
- Wide-angle lens port(WA005-A) (Compatible with multiple lenses)
- Wide-angle Barrel(WA005-B) (Compatible with multiple lenses)

PRODUCT DESCRIPTION

Plastic Version

For Nikon Camera Series

Z6/Z7

Compatible lens:

1. AF-S NIKKOR 16-35mm 1:4G ED
2. NIK SP 24-70mm f/2.8
3. AF-S VR 105mm f/2.8G IF-ED
4. AF-S FISHYE NIKKOR 8-15mm 1:3.5-4.5E ED

Size/Weight:

1. FL100 kit (W201.7 x D288 x H190.1mm/2308g)
2. WA005-A kit (W222.2 x D308 x H204mm/1920g)
3. WA005-B kit (W222.2 x D244 x H204mm/1765g)

Z6II/Z7II

Compatible lens:

1. AF-S NIKKOR 16-35mm 1:4G ED
2. NIK SP 24-70mm f/2.8
3. AF-S VR 105mm f/2.8G IF-ED
4. AF-S FISHYE NIKKOR 8-15mm 1:3.5-4.5E ED

Size/Weight:

1. FL100 kit (W201.7 x D288 x H190.1mm/2308g)
2. WA005-A kit (W222.2 x D308 x H204mm/1920g)
3. WA005-B kit (W222.2 x D244 x H204mm/1765g)

(WA005-A Kit)

(WA005-B Kit)

(FL100 Kit)



(Z6II/Z7II Housing)

- 1:Nikon:AF-S NIKKOR 16-35mm1:4G ED
2:NIK SP 24-70mm F/2.8
3:AF-S VR 105mm f/2.8G IF-ED
4:Z 24-70mm 1:2.8 S

- 1:Nikon:AF-S NIKKOR 16-35mm 1:4G ED
2:NIK SP 24-70mm F2.8
3:AF-S VR 105mm f/2.8G IF-ED
4:Z 24-70mm 1:2.8 S



(Z6/Z7 Housing)

AF-S FISHYE NIKKOR 8-15 1:3.5-4.5E ED

PRODUCT DESCRIPTION

Plastic Version

For Fujifilm Camera Series



X-T2

Compatible lens:

- 16-50mm/16-55mm/18-55mm
Depth rating: 40m/130ft
Size: W227 x D200 x H177mm
Weight: 1700g

X-T1

- Compatible lens: 18-55mm
Depth rating: 40m/130ft
Size: W185 x D200 x H180mm
Weight: 1305g



X-T3

- Compatible lens:
16-50mm/16-55mm/18-55mm
Depth rating: 40m/130ft
Size: W227 x D200 x H177mm
Weight: 1700g



PRODUCT DESCRIPTION

Plastic Version

For Fujifilm Camera Series



(FL100)

SF-X-T4

Depth rating: 40m/130ft

Compatible lens:

- ①XC 16-50mm 1:3.5-5.6
- ②XF 18-55mm 1:2.8-4 R
- ③XF 16-55mm 1:2.8 R

Size/Weight:

- ①WA005-A kit
(W224.8 x D277.2 x H218mm / 1799g)
- ②WA005-B kit
(W224.8 x D212.4 x H218mm / 1644g)
- ③WA005-F kit
(W226.6 x D253.5 x H191.9mm / 1712g)
- ④FL100 kit
(W211.5 x D255.7 x H188mm / 2199g)
- ⑤FL1545 kit
(W211.5 x D203 x H188mm / 2063g)



(FL1545)



(WA005-A)



(WA005-B)



(WA005-F)

Function Extension Support:

- ☒ Aperture Adjustment
- ☒ Vacuum Test
- ☒ 1/4 Mounting Plate Handheld Bracket
- ☒ Fiber Optic Cable Flash
- ☒ Lenses Manual Zoom
- ☒ Interchangeable Lenses Port
- ☒ Cold Shoe Interface
- ☒ Light Arms Extend
- ☒ Electronic Leak Detection Sensor

SF-S-X-T5

Depth rating: 40m/130ft

Compatible lens:

- ①XC 16-50mm 1:3.5-5.6
- ②XF 18-55mm 1:2.8-4 R
- ③XF 16-55mm 1:2.8 R

Size: W198 x D129 x H160mm

Weight: 1150g (Body weight)



SF-S-X-H2 / X-H2S

Depth rating: 40m/130ft

Compatible lens:

- ①XC 16-50mm 1:3.5-5.6
- ②XF 18-55mm 1:2.8-4 R
- ③XF 16-55mm 1:2.8 R

Size: W202 x D145 x H159mm

Weight: 1330g (Body weight)



PRODUCT DESCRIPTION

Plastic Version

For Fujifilm Camera Series



(FL100)

SF-X-T4

Depth rating: 40m/130ft

Compatible lens:

- ①XC 16-50mm 1:3.5-5.6
- ②XF 18-55mm 1:2.8-4 R
- ③XF 16-55mm 1:2.8 R

Size/Weight:

- ①WA005-A kit
(W224.8 x D277.2 x H218mm / 1799g)
- ②WA005-B kit
(W224.8 x D212.4 x H218mm / 1644g)
- ③WA005-F kit
(W226.6 x D253.5 x H191.9mm / 1712g)
- ④FL100 kit
(W211.5 x D255.7 x H188mm / 2199g)
- ⑤FL1545 kit
(W211.5 x D203 x H188mm / 2063g)



(FL1545)



(WA005-A)



(WA005-B)



(WA005-F)

Function Extension Support:

- ☒ Aperture Adjustment
- ☒ Vacuum Test
- ☒ 1/4 Mounting Plate Handheld Bracket
- ☒ Fiber Optic Cable Flash
- ☒ Lenses Manual Zoom
- ☒ Interchangeable Lenses Port
- ☒ Cold Shoe Interface
- ☒ Light Arms Extend
- ☒ Electronic Leak Detection Sensor

SF-S-X-T5

Depth rating: 40m/130ft

Compatible lens:

- ①XC 16-50mm 1:3.5-5.6
- ②XF 18-55mm 1:2.8-4 R
- ③XF 16-55mm 1:2.8 R

Size: W198 x D129 x H160mm

Weight: 1150g (Body weight)



SF-S-X-H2 / X-H2S

Depth rating: 40m/130ft

Compatible lens:

- ①XC 16-50mm 1:3.5-5.6
- ②XF 18-55mm 1:2.8-4 R
- ③XF 16-55mm 1:2.8 R

Size: W202 x D145 x H159mm

Weight: 1330g (Body weight)



PRODUCT DESCRIPTION

For Olympus Camera Series



Name: TG-4 Plastic

Depth rating: 60m/195ft

Size: W171 x D94 x H127mm

Weight: 680g



Name: TG-5 Plastic

Depth rating: 60m/195ft

Size: W171 x D94 x H127mm

Weight: 680g



Name: TG-6 Plastic

Depth rating: 60m/195ft

Size: W163.5 x D93 x H113mm

Weight: 545g

Color: ☒ ☐



Name: TG-5/6 Aluminum alloy

Depth rating: 100m/328ft

Size: W164.9 x D77 x H115mm

Weight: 735g

Color: ☒ ☐



Name: TG-7 (Plastic Version)

Depth rating: 60m/195ft

Size: W163.5 x D93 x H113mm

Weight: 545g

Color: ☒ ☐



Name: TG-7 (Aluminum Alloy)

Depth rating: 60m/195ft

Size: W163.5 x D93 x H113mm

Weight: 545g

Color: ☒ ☐

PRODUCT DESCRIPTION

Plastic Version

For Olympus Camera Series

E-M5

Compatible lens: 12-50mm

Size: W190 x D160 x H165mm

Weight: 1000g



(E-M5)

E-M5 III

Compatible lens:

① M.ZUIKO DIGITAL ED 12-50mm f/3.5-6.3 EZ

② M.ZUIKO DIGITAL ED 12-40mm F2.8 PRO

Size/Weight:

① 12-50mm kit (W197.2 x D200.3 x H153mm/1440g)

② 12-40mm kit (W206.9 x D253.5 x H208.3mm/1620g)



(E-M5 III/OM System OM5)

PRODUCT DESCRIPTION

Plastic Version

For Olympus OM-1



SF-S-OM-1

Depth rating: 40m/130ft

Compatible lens:

M.ZD ED 12-50mm F/3.5-6.3 EZ

M.ZD ED 12-40mm 1:2.8

OLYMPUS 12-100mm 1:4

Size: W208 x D139 x H158mm

Weight: 1205g(Body)



For Olympus OM-5 II PRO



SF-S-OM-5 II PRO

Depth rating: 40m/130ft



For Panasonic GH-5



GH5

Compatible lens: (12-60mm/45-150mm)

Size: W201 x D200 x H170mm

Weight: 1420g



PRODUCT DESCRIPTION

For Smart Phone Series



SF-PH-01 PRO

Depth rating: 40m/130ft
Waterproof structure: press-fit O-ring seal
Battery: 3V AAA battery*2 (*optional)
Material: PC/optical glass/stainless steel/
silicone rubber
Operating temperature: 0-40 °C
Interface: M67
Size: W212 x D60 x H112mm
Weight: 580g



SF-PH-02

Depth rating: 40m/130ft
Waterproof structure: press-fit O-ring seal
Battery: 3V AAA battery*2 (*optional)
Material: PC/optical glass/stainless steel/
silicone rubber
Operating temperature: 0-40 °C
Interface: M67
Size: W212 x D60 x H122.7mm
Weight: 668.5g



SF-PH-05

Waterproof depth: 20m/65 ft
Waterproof structure: O-ring seal
Battery: 3V CR2032 Lithium battery
Main material: PC/Optical glass/stainless steel/
silicone rubber
Applicable temperature: 0°C ~ 40°
Product size: 201*105*46mm
Product weight: 447g



SF-PH-08

Waterproof depth: 50m/165 ft
Waterproof structure: O-ring seal
Main material: PC/Optical glass/stainless steel/
silicone rubber
Applicable temperature: 0°C ~ 40°
Product size: 210*105*55mm
Product weight: 605g
Support system: iOS 13.0.0 and above
(CH/EN)Android 7.0 .0 and above (CH/EN)

PRODUCT DESCRIPTION

Vacuum Detection Series

VP-100

Product name: Vacuum detection system kit
Size: W60 x D29 x H155mm (VP-100 handle)
Ø41 x H35mm (VPS-100 alarm)
Applicable products: Waterproof housing with
vacuum interface

VP-100 Plus

Product name: Upgraded Vacuum Handle
Size: W97 x D35 x H204mm
Applicable products: Waterproof housing with
vacuum interface

VPS-102

Working voltage: 3.7V
Battery Type: 18650 Battery (Purchase separately)
Maximum Continuation Time: About 9 hours
Products Size: W51 x D30 x H96mm
Products Weight: 79g (Without Battery)



PRODUCT DESCRIPTION

Underwater Strobe

SF-01

Mode	Flash	Flash+Modelling light	Light
Guide Number	32GN	32GN+100LM	200LM
Number of Flashes	500times	12hours	6.5hours
Batteries	18650 High drain batteriesx2; or 18650 Normal lithium batteriesx2 *Note (Please purchase batteries separately)		
Recycle Indicator	LED Indicator flash		
Recycle Time	1.5S (High Drain Batteries);2.5-8S (Normal lithiumbatteries)		
Control	Rotary/fiber-optic cable/5-pin sync cord		
Depth Rating	100m/328ft		
LED Specification	6W 3535		
Color Temperature	5000-6000K		
Beam Angle	120°		
LED Lifetime	50000 hours		
Main material	PC		
Dimensions	W149 x D96 x H143mm		
Weight	751g		



Soft cover



Softball



Beamer


PRODUCT DESCRIPTION

SL Series Waterproof Lights



SL-18

Mode: White(Strong 1000lm/Low 500lm/
SOS 500lm); Red/Blue(1W)
Color temperature: 7500K
Beam angle: >120°
Depth rating: 40m/130ft.
Battery: Built-in lithium battery(1100mAh)
Size: W49 x D48 x H47mm
Weight: 100g



SL-19

Mode: White(Strong-2000lm/Low-600lm/
SOS-700lm); Red/Blue(1W)
Color temperature: 7500K
Beam angle: >120°
Depth rating: 60m/195ft.
Battery: Built-in lithium battery(1100mAh)
Size: W45 x D44 x H65mm
Weight: 114g



SL-20

Brightness: 5000LUX/20CM
Modes: White-Red-Orange-Yellow-Green-
Cyan-Blue-Purple
Lamp beads: 72PCS
Depth rating: 40m/130ft
Color temperature: 5000~6000K(white light)
Size: W110 X D46 X H98mm



SL-21

Mode: White(Strobe&Strong3500lm/
Low1500lm/SOS 1500lm); Red/Blue(3.5w)
Color temperature: 7000~7500K
Beam angle: >120°
Battery: 18650*3
Size: W125 x D56 x H86mm
Weight: 360g(Without battery)



SL-22

Mode: White(Strobe&Strong6000lm/
Low2600lm/SOS 2600lm); Red/Blue(3.5w)
Color temperature: 7000~7500K
Beam angle: >120°
Battery: 18650*4
Size: W145 x D61 x H104mm
Weight: 480g(Without battery)

PRODUCT DESCRIPTION

SL Series Waterproof Lights



SL-100

Mode: High-Low-Flash (Max 700lm)
Depth rating: 40m/130ft
Color temperature: 5500K
Beam angle: > 120°
Battery: Built-in 1900mAh rechargeable lithium battery
Size: W76 x D41 x H62mm
Weight: 153g



SL-104

Mode: High-Low-Flash (Max 1800lm)
Depth rating: 40m/130ft
Color temperature: 5500~6000K
Beam angle: > 120°
Battery: 18650*2 (*Optional)
Size: W110 x D90 x H50mm
Weight: 290g



SL-106

Mode: White(Strobe/Strong-1200lm/ Low-300lm/SOS-450lm)
Color temperature: 7500K
Beam angle: > 120°
Battery: Built-in rechargeable lithium battery(1800mAh)
Size: W125 x D129 x H32mm
Weight: 200g



SL-104

Power: 5W
Number of lamp beads: 48PCS
Depth rating: 40 meters / 130 feet
Color temperature: 2500-9000K±200
Product size: W65 x D58 x H33mm



SL-106

Input voltage: 5V
Color: Colorful
Color temperature: 6000-6500K
Warm light bead: 40 PCS
Charging way: Magnetic suction charging
Waterproof level: IPX 8(40m/130ft)



SL-105 (RG)

Power: 5W
Number of beads: 40PCS
Depth rating: 40 meters/130 feet
Color temperature: 2500-9000K±200
Product size: W65 x D58 x H33mm



ST49W

Mode: white-red-orange-yellow-green-cyan-blue-purple
Color temperature: 5500K(white light mode)
Waterproof information: 30m/98ft / IPX8
Input: 5V/2A ; USB type-C charging
Lamp beads: 40pcs white, 9pcs RGB
Product size: W66 x D31 x H81mm
Product weight: 125g

PRODUCT DESCRIPTION

Amphibious Flashlight



SF-L03

Mode: white light (high-low-flash) / laser (green)
Brightness: up to 1000 lumens (white light mode)
Beam angle: 60° (white light)
Laser wavelength: 650nm
Color temperature: 6500K (white light mode)
Depth rating: 100 meters (328 feet) / IPX8
Battery: 3.7V 18650 lithium battery (*optional)
Lens: 4mm optical tempered glass
Main material: aviation aluminum, optical glass, silicone, stainless steel
Size: lamp holder Ø36mm * battery box Ø28mm * total length 135mm
Weight: 208.5g (without battery)



MK-7

Depth rating: 100m/328ft
Mode: Strong-800lm/Low-300lm/ SOS-450lm/Laser-5mw
Color temperature: 6500K
Beam angle: 60 degree
Battery: 18650*1 (*Optional)
Size: Ø28 x H135mm
Weight: 114g



MK-12

Depth rating: 100m/328ft
Mode: Strong-1000lm/Low-300lm/ SOS-450lm/Laser-5mw
Color temperature: 6500K
Beam angle: 60°
Battery: 18650*1 (*Optional)
Size: Ø36 x H142mm
Weight: 163g

PRODUCT DESCRIPTION

Multifunctional Diving Flashlight



Model: SF-10

Lumen: 1000 Lm
Mode: white light + SOS
Color temperature: 5600K (CRI 93-96)
Waterproof depth: 100M/328FT IPX8
Material: aluminum alloy
Dimensions: Ø30 x 128mm
Battery category: 3.7V 18650 Lithium battery



Model: SF-20

Lumen: 2000 Lm
Mode: white light + SOS
Color temperature: 5600K (CRI 93-96)
Waterproof depth: 100M/328FT IPX8
Material: aluminum alloy
Dimensions: Ø34 x 128mm
Battery category: 3.7V 18650 Lithium battery



Model: SF-30

Lumen: 3000 Lm
Mode: white light + SOS
Color temperature: 5600K (CRI 93-96)
Waterproof depth: 100M/328FT IPX8
Material: aluminum alloy
Dimensions: Ø48 x 126mm
Battery category: 3.7V 18650 Lithium battery
Weight: 205g



Model: SF-60

Lumen: 6000 Lm
Mode: white light+ colorful light+fiber optic cable control
Color temperature: 5600K (CRI 93-96)
Waterproof depth: 100M/328FT IPX8
Material: aluminum alloy
Dimensions: Ø76 x 132mm
Battery category: 3.7V 18650 Lithium battery




SF-70

Lumen: 7000 Lm
Mode: white light+ red light+ UV light+ fiber optic control
Color temperature: 5600K (CRI 93-96)
Waterproof depth: 100M/328FT IPX8
Material: aluminum alloy
Dimensions: Ø70 x 150mm
Battery category: 3.7V 18650
Weight: 830g

PRODUCT DESCRIPTION

Diving Video Light



SF-150

white light + SOS + remote control

Lumen: 15000 Lm

Mode: Light/Flash/SOS/Continuous Flashing

Control Method: button+knob+fiber optic control (brightness increase/decrease)

Color temperature: 5600K (CRI 93-96)

Waterproof depth: 150M/492FT IPX8

Material: aluminum alloy

Dimensions: Ø79 x 233mm

Battery category: 14.8V 6800 mAh

Weight: 1050g



SF-100

Lumen: 10000 Lm
Mode: white light + SOS + remote control
Color temperature: 5600K (CRI 93-96)
Waterproof depth: 150M/492FT IPX8
Material: aluminum alloy
Dimensions: Ø79 x 168mm
Battery category: 14.8V 3400 mAh
Weight: 800g



Remote Control

Support: SF100/SF150
Model: RE-001
Waterproof depth: 150M/492FT
Operating Environment: -30°C~40°C
Material: Aluminum Alloy
Weight: 95g
Dimensions: : W43 x D57 x H57mm
Battery Life: > One Year

PRODUCT DESCRIPTION

Multifunctional Diving Flashlight



MK-8

Lamp beads: 9090*6, blue/purple *4, red*4
Brightness: 11000 lumens
Depth Rating: 100m/328ft
Size: head-65mm tail-52.5mm length-118mm



MK-17

Lamp beads: White*82, red*50, blue*40
Brightness: 11000 lumens
Depth rating: 80meters / 262 feet (IPX8)
Size: Head-D68mm, Tail-D55mm, Leng-133mm
Net weight: 479g



SF-W01

Size: W128 x D74 x H138mm
Weight: 605g



SF-W02

Size: W128 x D74 x H138mm
Weight: 635g



MK-9

Lamp beads: L2*15, blue/purple*6, red*6
Brightness: 11000 lumens
Depth Rating: 100m/328ft
Size: Head-D65mm Tail-D52.5mm Length-118mm



MK-19

Light source: XHP-50(white 6500K, yellow 3000K)
Brightness: 11000 lumens
Dimensions: Head-D65, Body-D50.3, Length-119 (mm)
Weight: 600 grams (net weight)
Depth Rating: 100m/328ft



SF-W03

Size: W145 x D78mm x H108mm
Weight: 653g



MK-20

Lamp beads: L2*10, blue/purple*4, red*4
Brightness: 11000 lumens
Depth Rating: 100m/328ft
Size: Head-65mm Tail-52.5mm Length-118mm



Lighting source: White light 120X120 36-Core LED 4 pcs, 80W
Brightness: 11000 lumens
Size: Head-D60mm, tail-D60mm, length-132mm
Weight: 588g (Net weight)
Depth rating: 100 meters / 328 feet



SF-W04

Size: W145 x D78mm x H108mm
Weight: 688g



PRODUCT DESCRIPTION

Diving Signal Lamp



Lights   

Model:	SF-P01
Power:	0.5 W
Working voltage:	4.5 V
Quiescent current:	5 μA
Battery:	LR44 * 3
Battery life:	36h (Depend on battery quality)
Material:	PP/303 Stainless steel
Size:	Ø24 x H61mm
Weight:	24g

Waterproof Ambient Lamp

Lights



Model number: SF-P02	Waterproof depth: 10m/33ft
Input voltage: DC 5V	Lighting time: up to 3 hours at a time
Enter interface: Type-C	Product size: Ø150/Ø200/Ø250 mm
Battery capacity: 1200mAh	(Three specifications, please refer to the purchase specifications)
Number of beads: 15	Product weight: 270g/460g/602g

PRODUCT DESCRIPTION

Dome Port Series



WA005(A/B/C/D/E/F)

Lens diameter: 6inch/152mm
Compatible for: different waterproof housing
(*Refer to the waterproof case description or model list)



WA006(A/B/C/D)

Lens diameter: 8inch/203mm
Compatible for: different waterproof housing
(*Refer to the waterproof case description or model list)

PRODUCT DESCRIPTION

M52/M67 Wide Angle Port



■ SF-YWL-01

Dimensions: $\phi 97.5 \times 37.5$ mm
Weight: approx. 370g
Compatible for all 67mm interface
waterproof housing



■ 67mm-01

Lens diameter: 4.3 inch/109mm
Dimensions: 160*140*71.8mm
Weight: approx. 550g
Compatible for all 67mm interface
waterproof housing



■ WA52GL00033

■ SF-YML-01

Dimensions: $\phi 78 \times 26.5$ mm
Weight: approx. 330g
Compatible for all 67mm interface
waterproof housing



■ 67mm-02

Lens diameter: 6 inch/152mm
Dimensions: 208*190*83mm
Weight: approx. 750g
Compatible for all 67mm interface
waterproof housing



■ WA67GL00034

M67 wide angle lens
Compatible for all
67mm interface
waterproof housing

DIVING ACCESSORIES

Model: BH-2



Model: BH-3
2" Base Adapter



Model: BH-4
1/4"-20



Model: BH-5
3/8"-16



Model: BH-6
3.5" Double ball



Model: BH-7
6" Double ball



Model: BH-8
6" Double YS



Model: BH-9
3" T-Groove Adapter



Model: BH-10
1/4"-20



Model: YB-1



Model: YB-2



Model: CP-2



Model: CP-3



Model: CP-4



Model: CP-5



Model: CP-6



DIVING ACCESSORIES

Model:CP-7



Model:DH-(1~10)
Diameter:20mm,22mm,24mm,26mm,
28mm,30mm,32mm,34mm,36mm,38mm




Model:AT-1
M67 TO M67 Swing Mount



Model:FR-1
M67 threaded
interface




Model: AM-1,DA-6/2/3/4/5
3.5" 5" 8" 10" 12" 16"
Double Ball Arm



Model:AM-(3/8/2/4/5)
2.2"/3"/3.5"/5.5"/7"
YS Ball Arm



Model:AM-9/AM-16/DA-1/AM-10
4",5",6",8" Double Ball Arm



Model:AM-22/AM-6
6",8" YS Ball Arm



Model:TS-19
Size: 160*110mm



Model:TS-5
Size:330*50*210mm



Model:TS-6
Min:270*145*65mm
Max:325*145*65mm



Model:TS-7



Model: TS-8



Model: FR-2
Specification: 30M



Model:FA-(1/213/4/5)
Specification:
185/240/300/360/410(mm)



Model:GA-(5/6/7/8/9/10/1 1)
D60mm(7"/8"110"1127D80mm(7"/8"/10")



DIVING ACCESSORIES

Model: SR-009A
Flash trigger



Model: SJ-1



Model: SJ-2



Model: TB-1



Model: BR-1



Model: BR-2



Model: BR-3



Model:
OF-01/OF-02



5-Pin Trigger
sync cable

Model:OR-1
Specification:200cm



Model:OR-2
Specification:150cm



Model:OR-3



Model:OR-4



Model:MS-1/2



Model:K2



Model:NC-1/NC-2
6 inch/8 inch/10 inch




SF-GP-01/SF-DJ-01/SF-IS-01



Camera Housing Set Diagram



Camera Housing Set Diagram

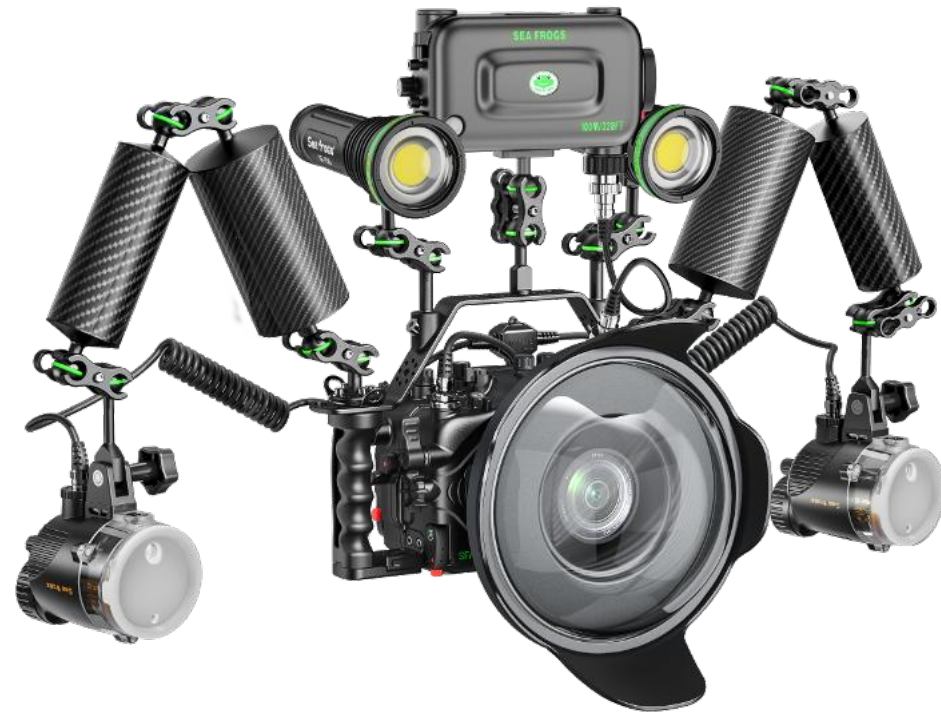



MODEL LIST

 Sony Series	Plastic (40-60m)	Aluminum (100m/328ft)	Lenses Port Support
RX100 (I-V)	✓	/	/
RX100VI (24-200mm)	✓	/	/
RX100VII (24-200mm)	✓	/	/
A6000/A6300/A6500 (16-50mm)	✓	/	/
A6400 (16-50mm)	✓	/	/
A6600 (10-18/16-35/16-50/ 28-70/90mm)	✓	/	✓
A6700 (16-35/28-70/90mm)	✓	✓	✓
A7 (16-35/28-70/90mm)	✓	/	✓
A7C (10-18/16-35/16-50/ 28-60/28-70/90mm)	✓	/	✓
A7II (16-35/28-70/90mm)	✓	/	✓
A7RIII (16-35/28-70/90mm)	✓	✓	✓
A7RIV (16-35/28-70/90mm)	✓	✓	✓
A7RIVA (16-35/28-70/90mm)	✓	/	✓
A7RV (12-24/16-35/24-70mm)	✓	✓	✓
A7SIII/A7SIII Pro (16-35/28-70/90mm)	✓	✓	✓
A9 (16-35/28-70/90mm)	✓	/	✓
A9II (16-35/28-70/90mm)	✓	/	✓
A9III (16-35/28-70/90mm)	✓	✓	✓
A1 (12-24/14-24/16-35/17-28/ 24-70/28-70/90mm)	✓	✓	✓
FDR-AX30/AX40	✓	/	/
FDR-AXP55	✓	/	/
A7M4 (16-35/24-70/12-24/14-24mm)	✓	✓	✓
FX3/FX30	✓	✓	✓
ZV-1	✓	/	/
ZV-E1	✓	✓	✓
ZV-E10(10-18/16-35/16-50/28-70mm)	✓	/	✓
A7C II (10-18/16-35/16-50/24-70mm)	✓	✓	✓
A7C R (10-18/16-35/16-50/24-70mm)	✓	✓	✓
A1 II	/	✓	✓
A7M5	✓	✓	✓
ZV-E10 II	✓	✓	✓
A7RVI	/	✓	✓

*Note: For detailed information about the waterproof housing lens, please refer to the detailed diagram in the catalog or the extended system chart.

 Canon Series	Plastic (40-60m)	Aluminum (100m/328ft)	Lenses Port Support
G1X Mark III (12-60/45-150mm)	✓	/	/
G7X Mark II	✓	/	/
G7X Mark III (24-100mm)	✓	/	/
EOS M/M2/M3 (18-55mm)	✓	/	/
M5 (22/18-55mm)	✓	/	/
M50 (22/18-55/15-45mm)	✓	/	/
M6 (22/18-55mm)	✓	/	/
M6II (22/18-55mm)	✓	/	✓
550D (18-55mm)	✓	/	/
70D/80D (18-135mm)	✓	/	/
750D (18-55/18-135mm)	✓	/	✓
760D (18-55/18-135mm)	✓	/	✓
5DIII/5DIV (24-105/100mm)	✓	/	✓
6DII (16-35/24-70/24-105/100mm)	✓	/	✓
EOS R (16-35/100mm)	✓	/	✓
EOS RP (16-35/24-105/100mm)	✓	/	✓
EOS R3	✓	/	✓
EOS R5 (15-35/16-35/24-105/ 60/100mm)	✓	/	✓
EOS R5II (15-35/16-35/24-105/ 60/100mm)	✓	✓	✓
EOS R6 (15-35/16-35/24-105/ 60/100mm)	✓	/	✓
EOS R6II (8-15/14-35/15-35/ 100mm)	✓	✓	✓
EOS R50 (15-35/16-35/24-105/24-70 /17-40/60/100mm)	✓	/	✓
RSC	/	✓	✓
C50	/	✓	✓
PowerShot V1	/	✓	/

MODEL LIST

 Action Camera	Plastic (40-60m)	Aluminum (200m/656ft)	Lenses Port Support
GoPro 13/12/11/10/9	✓	✓	/
Dji Osmo 6/5Pro/4	✓	✓	/
Dji Osmo 360	✓	/	/
Insta 360 ACE PRO 2	✓	/	/
Insta 360 X5	✓	/	/
 Olympus Series	Plastic (40-60m)	Aluminum (100m/328ft)	Lenses Port Support
E-M5 (12-50mm)	✓	/	/
E-M5III (12-40/12-50mm)	✓	/	✓
TG-4/5/6	✓	✓	/
TG-7 (For OM System TG-7)	✓	✓	/
OM-1/OM-1 II (12-50/12-40/12-100mm)	✓	✓	✓
OM-5 (12-50mm)(OM System)	✓	✓	✓
OM-5 II	✓	✓	✓

 Panasonic Series	Plastic (40-60m)	Aluminum (100m/328ft)	Lenses Port Support
GF2 (14-42mm)	✓	/	/
GM1	✓	/	/
LX100	✓	/	/
GH5 (12-60/45-150mm)	✓	/	✓
GH7	/	✓	✓

 Nikon Series	Plastic (40-60m)	Aluminum (100m/328ft)	Lenses Port Support
D850	/	✓	✓
Z6/Z7 (8-15/16-35/24-70/105mm)	✓	✓	✓
Z6II/Z7II (8-15/16-35/24-70/ 105mm)	✓	✓	✓
Z8 (8-15/16-35/24-70/105mm)	/	✓	✓
Z6 III	/	✓	✓
ZR	/	✓	✓
Z9	/	✓	✓

 Fujifilm Series	Plastic (40-60m)	Aluminum (100m/328ft)	Lenses Port Support
X-T1 (18-55mm)	✓	/	/
X-T2 (16-50/16-55/18-55mm)	✓	/	✓
X-T20 (16-50mm)	✓	/	/
X-T3 (16-50/16-55/18-55mm)	✓	/	✓
X-T30 (16-50/16-55/18-55mm)	✓	/	/
X-T4 (16-50/16-55/18-55mm)	✓	/	✓
X-H2/X-H2S (16-50/16-55/18-55mm)	✓	/	✓
X-T5 (16-50/16-55/18-55mm)	✓	✓	✓
GFX100 II (16-50/16-55/18-55mm)	/	✓	✓
GFX100S II	/	✓	✓
X-T50	✓	/	✓
X-S20	✓	/	✓

 Sigma Series	Plastic (40-60m)	Aluminum (100m/328ft)	Lenses Port Support
FP	/	✓	✓

 Diving Video Light	Depth Rating	Product Features
SF-10	100m/328ft	Diving light,up to 1000 lm,white light
SF-20	100m/328ft	Diving light,up to 2000 lm,white light/
SF-30	100m/328ft	Diving light,up to 3000 lm,white light/
SF-60	100m/328ft	Diving light,up to 6000 lm,white light, white light+red,blue light
SF-70	100m/328ft	Diving light,up to 7000 lm,white light, white light+red,blue light
SF-100	150m/492ft	Diving light,up to 10000 lm,white light
SF-150	150m/492ft	Diving light,up to 15000 lm,white light

MODEL LIST

Strobe/Fill light/Flash light	Depth Rating	Product Features
SF-01 Strobe	100m/328ft	Advanced underwater flash, supports optical fiber trigger, 5-pin sync cable trigger, 32GN index, up to 1.5 seconds extremely fast recharge
ST-100 Pro Strobe	100m/328ft	Professional underwater flash, support optical fiber trigger
SF-L01 Flashlight	60m/195ft	Multi-mode colorful flashlight, support optical fiber trigger
SF-L03 Flashlight	100m/328ft	Concentrating design all-aluminum alloy flashlight, three-block white light + green laser
MK-01 Flashlight	100m/328ft	3000lm multifunctional diving flashlight,support optical fiber triggering
MK-02 Flashlight	100m/328ft	6000lm multifunctional diving flashlight,support optical fiber triggering
MK-03 Flashlight	100m/328ft	Small and light flashlight, three white light + red laser
MK-05 Flashlight	100m/328ft	Small and light flashlight, three white light
MK-7 Flashlight	100m/328ft	All-aluminum alloy compact flashlight, three-block white light
MK-8 Flashlight	100m/328ft	All-aluminum alloy compact flashlight
MK-9 Flashlight	100m/328ft	All-aluminum alloy compact flashlight
MK-10 Flashlight	100m/328ft	All-aluminum alloy compact flashlight
MK-12 Flashlight	100m/328ft	All-aluminum alloy flashlight, three-block white light + red laser
MK-17 Flashlight	100m/328ft	All-aluminum alloy compact flashlight
MK-19 Flashlight	100m/328ft	All-aluminum alloy compact flashlight
MK-20 Flashlight	100m/328ft	All-aluminum alloy compact flashlight
SL-18 Small fill light	40m/130ft	Mini fill light, up to 1000lm, three white light + red, blue light
SL-19 Small fill light	60m/195ft	2000lm mini fill light, three blocks of white light + red, blue light
ST49W Small RGB fill light	30m/98ft	Colorful fill light, white, red, orange, yellow, green, blue, cyan, purple
SL-20 RGB Fill light	40m/130ft	Colorful fill light, white, red, orange, yellow, green, blue, cyan, purple
SL-21 Fill light	40m/130ft	3500lm fill light, three white light + red, blue light, support optical fiber trigger
SL-22 Fill light	40m/130ft	6000lm fill light, three white light + red, blue light,support optical fiber flash
SL-100 Small fill light	40m/130ft	Small fill light, three-block white light, brightness up to 700lm
SL-101 Fill light	40m/130ft	Fill light, three-block white light, maximum brightness 1800lm
SL-104	40m/130ft	S2500K~9000K Mini fill light
SL-105	40m/130ft	RGB Mini fill light
SL-106	40m/130ft	
SL-108 Ring macro fill light	40m/130ft	M67 interface, amphibious, macro fill light + optical fiber flash

MODEL LIST

Strobe/Fill light/Flash light	Depth Rating	Product Features
SL-109	40m/130ft	Small handheld fill light, can be used with GOPRO
SF-P01 Diving signal light	60m/195ft	Diving signal lights, red, blue and green lights are optional
SF-P02 Ambient light	10m/33ft	Amphibious ambient light, can be used to create atmosphere for taking photos or videos
SF-W01	100m/328ft	Diving light, up to 9000lm, three white light + red, blue light
SF-W02	100m/328ft	Diving light, up to 11000lm, three white light + red, blue light
SF-W03	100m/328ft	Diving light, up to 13000lm, three white light + red, blue light
SF-W04	100m/328ft	Diving light, up to 15000lm, three white light + red, blue light

Smart Phone Series	Depth Rating	Acrylic Port Support	Product Features
iPhone 6/7/8/X/XR (BT)	60m/195ft	√	Button control (Bluetooth + APP)
iPhone X/11Pro (BN)	60m/195ft	√	Button control
iPhone 6P/7P/8P/XsMax (BT)	60m/195ft	√	Button control (Bluetooth + APP)
HW P20/P30/P30Pro (BT)	40m/130ft	/	Button control (Bluetooth + APP)
HW Mate30/Mate30Pro (BT)	40m/130ft	/	Button control (Bluetooth + APP)
SF-PH-01 PRO	40m/130ft	√	New bluetooth mouse control, magnetic suction design common to 90% of smart phones
SF-PH-02	40m/130ft	√	New bluetooth mouse control, accurate model matching for Android/Apple smart phones
SF-PH-05	20m/65ft	/	New bluetooth mouse control, accurate model matching for Android/Apple smart phones
SF-PH-08	50m/165	/	New bluetooth mouse control, accurate model matching for Android/Apple smart phones